

# TDS TECHNICAL DATA SHEET

**CLASSIC**  
Recess Mirror Optics CFL Luminaire



## Description:

**CLASSIC** is an indoor recessed mounted luminaire with high efficiency mirror optics parabolic side reflectors & "V" shaped cross louvers for excellent glare control.

## Technical Specification:

**Housing :** Pre-treated CRCA MS with epoxy powder coated finish.

**Side Reflector :** Aluminium anodized high bright parabolic reflector. for good optical performance.

**Cross Louver:** Aluminium anodized " V " shaped cross louvers to control degree of glare.



**Internal Wiring:** PVC insulated. Single strand copper conductor.

**Mains Terminal:** 10 amps. suitable for terminating 2.5 sq.mm conductor.

**Hardware:** MS; Zinc plated & passivated.

**Earthing:** 1 No. inside, suitable for 2.5 sq. mm. earthing conductor.

**Ballast:** Option available for both Electro Magnetic Ballast (EMB) & Electronic Ballast (EB).

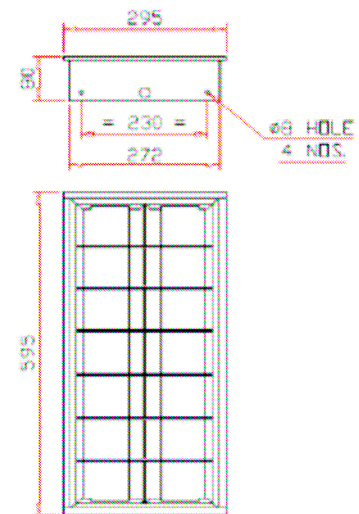

Nominal Dimensions in mm, Tolerance +/- 2 mm

## Range:

CAT.REF:	Lamp	Voltage	Ballast	Capacitor	Mains current	Power factor	Approx Wt (Kg)
SCR 236 CF M GC	2X36 CFL	240V	EMB	8 MFD	0.43 A	>0.85	2.10
SCR 236 CF M GC EB1/P	2X36 CFL	240V	EB	NA	0.36 A	>0.95	1.20

## Installation:

- Suitable for 600MM x 600MM Metric ceilings
- Four nos. clear embossed holes for chain suspension.

## Application:

Retail shop, Software parks, Offices, Banks  
Conference rooms, Offices of Financial Services, etc.



DRAWN	PB	DRG.NO :	TD 02-009B
CHECKED	SN	REV. NO:	0
APPROVED	SC	DATE:	20.02.2009

Luminaire Business Group

Surya Roshni Ltd, Padma Tower-I, Rajendra Place, New Delhi-110008

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in detail from the given here.