



### Description:

**DAINTY SQUARE** is an indoor surface mounted luminaire with high efficiency mirror optics with parabolic side reflectors and matt finished cross louvers for limited glare control .

### Technical Specification:

**Housing :** Pre-treated CRCA MS with epoxy powder coated finish.

**Reflector assembly :** Pre-anodised aluminium reflector and parabolic cross louvre.

**Side Reflector :** Pre-anodised aluminium specular parabolic side reflector for good optical performance.

**Cross Louver:** Anodized aluminium, matt finish to limit degree of glare.


**Internal Wiring:** PVC insulated. Single strand copper conductor.

**Mains Terminal:** 10 amps. suitable for terminating 2.5 sq.mm conductor.

**Hardware:** MS; Zinc plated & passivated.

**Earthing:** 1 No. inside, suitable for 2.5 sq. mm. earthing conductor.

**Ballast:** Option available for both Electro Magnetic Ballast (EMB) & Electronic Ballast (EB).

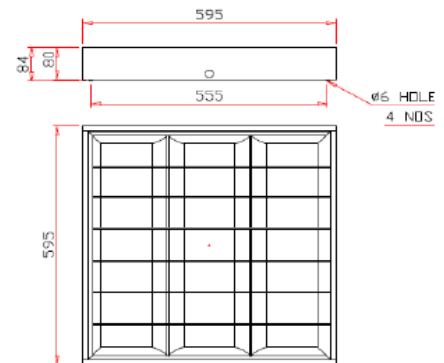

Nominal Dimensions in mm, Tolerance +/-2 mm

### Range:

CAT.REF:	Lamp	Voltage	Ballast	Capacitor	Mains current	Power factor	Approx Wt (Kg)
SCS 336 CF	3X36 CFL	240V	EMB	12 MFD	0.61 A	>0.85	3.80
SCS 336 CF EB2/P3	3X36 CFL	240V	EB	NA	0.48 A	>0.95	2.80

### Installation:

Four clear embossed holes on rear for surface mounting.

### Application:

Retail shop,Software parks,Offices,Banks  
Conference rooms, Offices of Financial Service area, etc.



DRAWN	PB	DRG.NO :	TD 02-007A
CHECKED	SN	REV. NO:	0
APPROVED	SC	DATE:	20.02.2009

Luminaire Business Group

Surya Roshni Ltd, Padma Tower-I, Rajendra Place, New Delhi-110008

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in detail given here.