

TDS TECHNICAL DATA SHEET

DAZZLE
Recessed MH Down light



Description:

Indoor recessed mounting Circular non-integral Metal Halide Down light with aluminium anodized specular finish reflector suitable for single 70W/150W MH DE lamp.



Technical Specification:

Housing : Pretreated CRCA MS with epoxy powder coated finish.

Reflector : Aluminium anodized specular finish back reflector with front glass cover.

Mounting Clips : 3 nos. spring steel retaining clips for positioning in false ceiling.



Internal Wiring: Silicon insulated multi strand copper conductor.

Mains Terminal: 10 amps. suitable for terminating 2.5 sq.mm conductor.

Hardware: MS, Zinc plated & passivated.

Earthing: 1 No. inside, suitable for 2.5 sq. mm. conductor earthing.

Ballast: Needs to be used in conjunction with an appropriate electronic ballast and to be mounted separately.

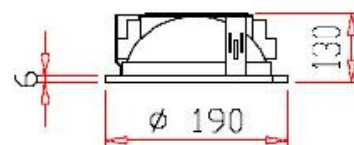

Cut Out Dia.170 mm.

Nominal Dimensions in mm, Tolerance +/-2 mm

Range:

CAT.REF:	Lamp	Voltage	Ballast	Capacitor	Mains current	Power factor	Approx Wt (Kg)
SDLHR 70 MH DE SF/G	1X70 MH DE	240V	EB	NA	0.46 A	NA	0.90
SDLHR 15 MH DE SF/G	1X150 MH DE	240V	EB	NA	0.75 A	NA	0.90

Installation:

- 1 .Suitable for 170mm Dia. cut out in ceiling.
2. Three nos. spring steel clips provided for mounting in ceiling.

Application:

Offices, Hotels, Software parks, Hospitals, Conference rooms etc.



DRAWN	PB	DRG.NO :	TD 03-009
CHECKED	SN	REV. NO:	0
APPROVED	SC	DATE:	20.02.2009
Luminaire Business Group			
Surya Roshni Ltd, Padma Tower-I, Rajendra Place, New Delhi-110008			

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in detail from the data given here.