

TDS TECHNICAL DATA SHEET

CLASSIC SQUARE Recessed 3 x 36 CFL Luminaire



Description:

CLASSIC SQUARE is an indoor recessed mounted luminaire with high efficiency mirror optics with parabolic side reflectors & "V" shaped cross louvers for excellent glare control.

Technical Specification:

Housing : Pre-treated CRCA MS with epoxy powder coated finish.

Reflector assembly : Pre-anodised aluminium reflector and parabolic cross louver.

Cross Louver: Anodized aluminium, matt finish to limit degree of glare.


Internal Wiring: PVC insulated. Single strand copper conductor.

Mains Terminal: 10 amps. suitable for terminating 2.5 sq.mm conductor.

Hardware: MS; Zinc plated & passivated.

Earthing: 1 No. inside, suitable for 2.5 sq. mm. earthing conductor.

Ballast: Option available for both Electro Magnetic Ballast (EMB) & Electronic Ballast (EB).

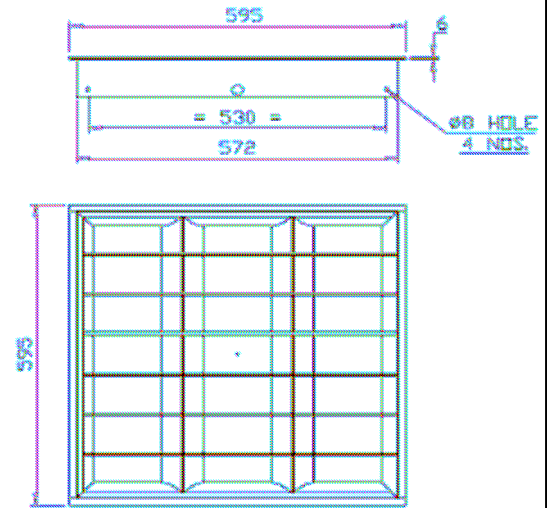

Nominal Dimensions in mm, Tolerance +/- 2 mm

Range:

CAT.REF:	Lamp	Voltage	Ballast	Capacitor	Mains current	Power factor	Approx Wt (Kg)
SCR 336 CF M GC	3X36 CFL	240V	EMB	12 MFD	0.61 A	>0.85	3.80
SCR 336 CF M GC EB2/P3	3X36 CFL	240V	EB	NA	0.48 A	>0.93	2.80

Installation:

- Suitable for 600MM x 600MM Metric ceilings
- Four nos. clear embossed holes for chain suspension.

Application:

Retail shop, Software parks, Offices, Banks
Conference rooms, Offices of Financial Services, etc.



DRAWN	PB	DRG.NO :	TD 02-010B
CHECKED	SN	REV. NO:	0
APPROVED	SC	DATE:	20.02.2009

Luminaire Business Group

Surya Roshni Ltd, Padma Tower-I, Rajendra Place, New Delhi-110008

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in detail from the given here.